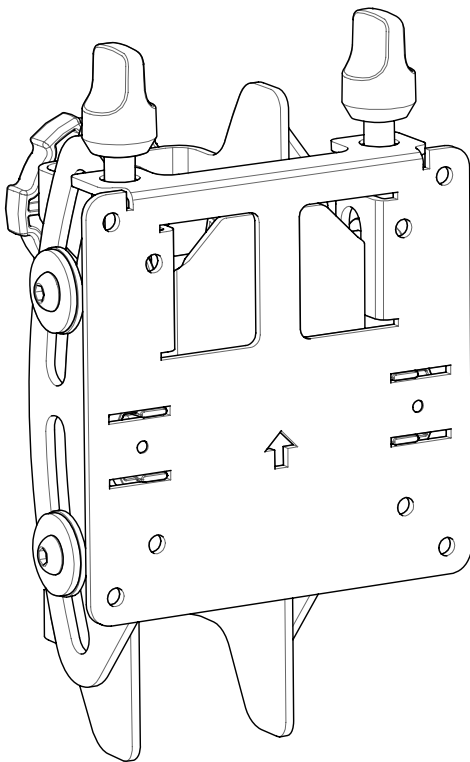
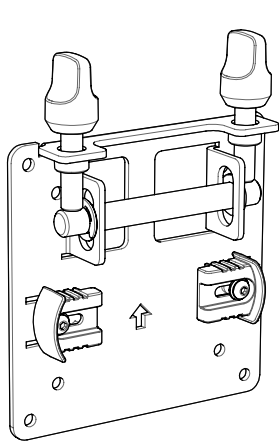


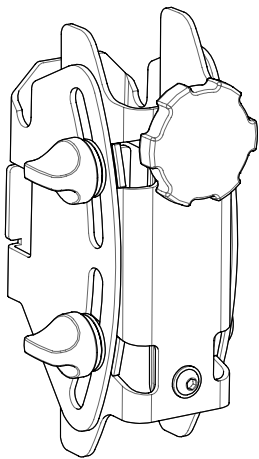
AWM Tilt Bracket



COMPONENT CHECKLIST



A
VESA Plate
(x2)



B
Bracket
(x2)

C
M4x10
Screw
(x4)

E
10mm
Spacer
(4x)

D
M4x20
Screw
(x4)

F
4mm
Hex Key
(x1)



REQUIRED TOOLS

- Phillips Head Screwdriver

CAPACITY

Flat Monitor
4.5 - 25kg (10 - 55lb)

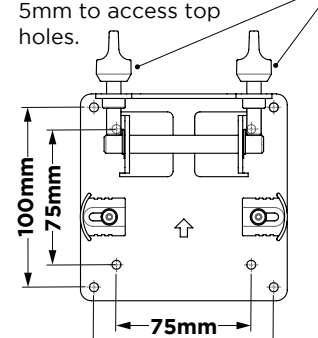
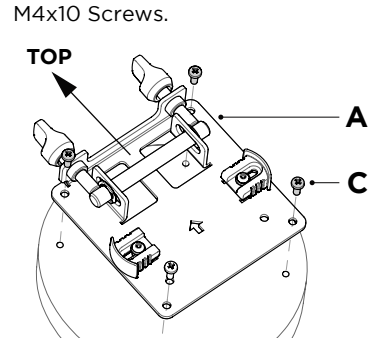
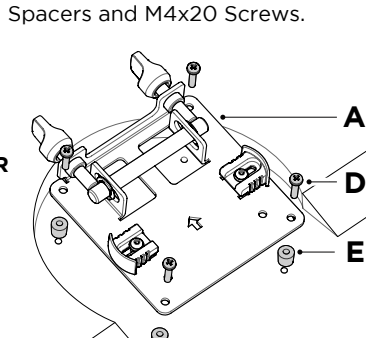
Curved Monitor
4.5 - 18kg (10 - 40lb)

Display Size
24" - 55"
300mm (12") max overall
display depth

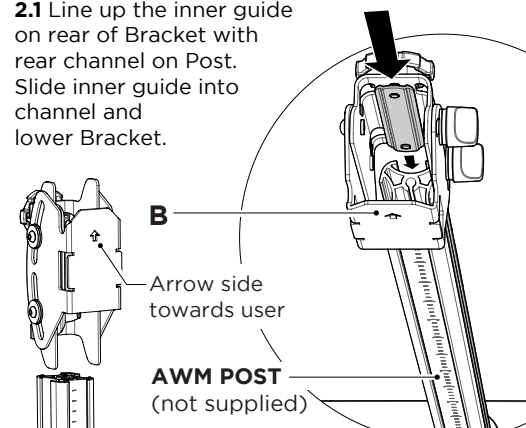
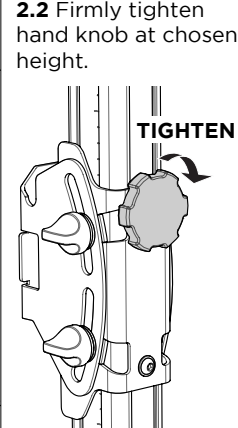
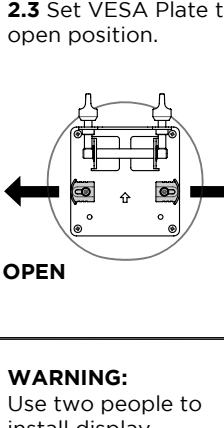
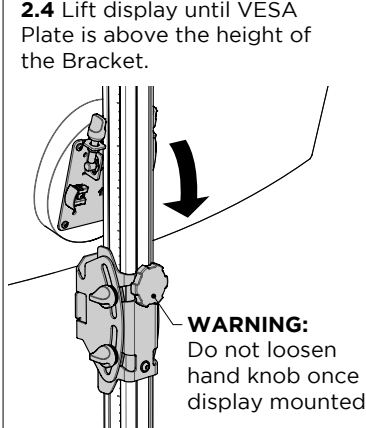
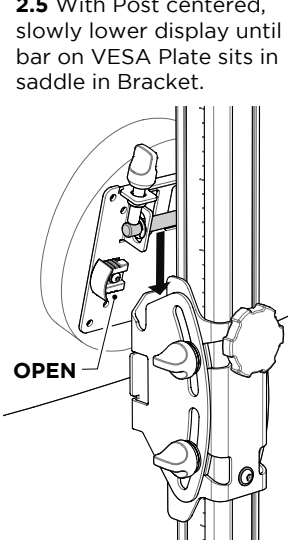
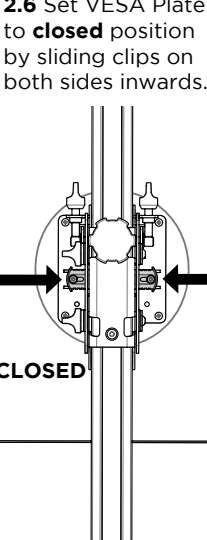
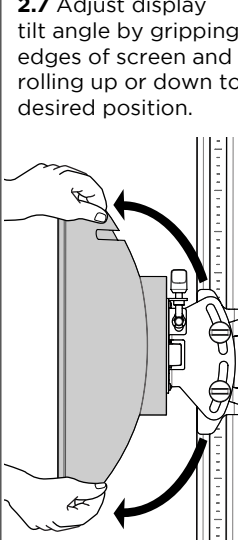
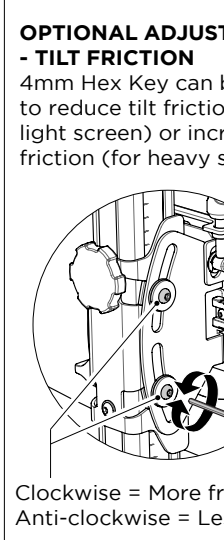
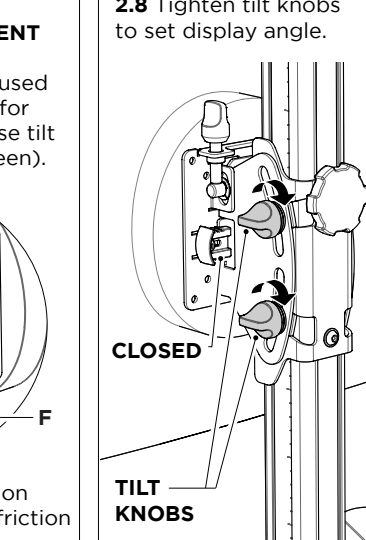
IMPORTANT INFORMATION

- ! Please ensure this product is installed as per these installation instructions.
- ! Each Bracket supports a maximum weight as per above capacity specification.
- ! This product is not suitable for outdoor use.
- ! Do not use this product for mobile applications.
- ! VESA mounted accessories (such as mini PC brackets and mounts), and offset VESA locations exert additional leverage that can exceed the capacity of the mount even though the monitor weight may be within the stated range. Please contact Atdec if you would like further information.

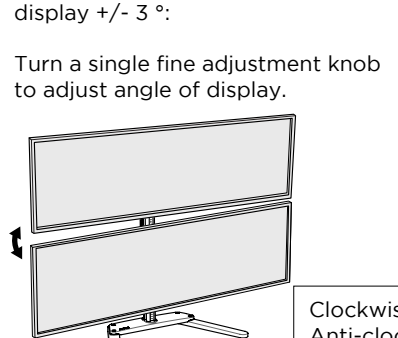
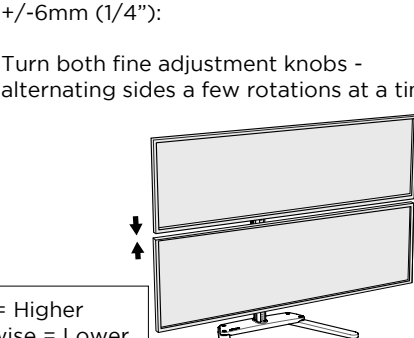
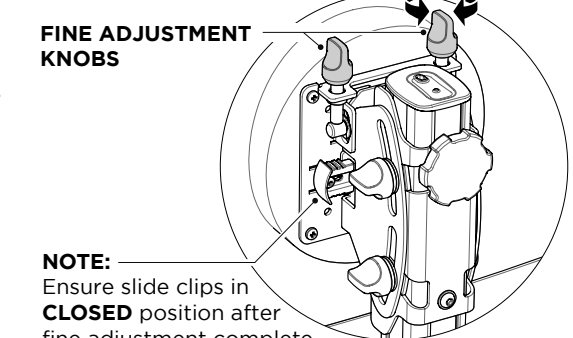
1. Attach VESA Plate to Display

<p>1.1 VESA compatibility</p> <p>NOTE: Some displays require the use of a VESA adapter before attaching the VESA Plate. This VESA adapter may ship in the box with the display. Consult your display's installation guide for further information.</p>	<p>For 75mm VESA unscrew 5mm to access top holes.</p> 	<p>1.2 Attach VESA Plate with M4x10 Screws.</p> 	<p>1.2 For recessed VESA use 10mm Spacers and M4x20 Screws.</p> 
--	---	---	--

2. Slide Bracket onto Post, Set Height and Mount Display

<p>2.1 Line up the inner guide on rear of Bracket with rear channel on Post. Slide inner guide into channel and lower Bracket.</p> 	<p>2.2 Firmly tighten hand knob at chosen height.</p> 	<p>2.3 Set VESA Plate to open position.</p>  <p>WARNING: Use two people to install display</p>	<p>2.4 Lift display until VESA Plate is above the height of the Bracket.</p> 	
<p>2.5 With Post centered, slowly lower display until bar on VESA Plate sits in saddle in Bracket.</p> 	<p>2.6 Set VESA Plate to closed position by sliding clips on both sides inwards.</p> 	<p>2.7 Adjust display tilt angle by gripping edges of screen and rolling up or down to desired position.</p> 	<p>OPTIONAL ADJUSTMENT - TILT FRICTION 4mm Hex Key can be used to reduce tilt friction (for light screen) or increase tilt friction (for heavy screen).</p>  <p>Clockwise = More friction Anti-clockwise = Less friction</p>	<p>2.8 Tighten tilt knobs to set display angle.</p> 

3. Fine Adjustment

<p>3.1 To correct horizontal angle of display +/- 3°:</p> <p>Turn a single fine adjustment knob to adjust angle of display.</p>  <p>Clockwise = Higher Anti-clockwise = Lower</p>	<p>3.2 To close small gap between displays +/-6mm (1/4"):</p> <p>Turn both fine adjustment knobs - alternating sides a few rotations at a time.</p> 	<p>NOTE: Ensure slide clips in CLOSED position after fine adjustment complete</p> 
--	--	--